

# MDA HT Series

## SMD Low Profile High Current Molded Inductor

### Size 1365

#### FEATURES

Ultra low buzz noise, due to composite construction .



AEC-Q200 qualified.  
 Operating temperature: -55 to +155 °C (including self-temperature rise)  
 Quantity: 500PCS



#### APPLICATION

Headlamps, tail lamps and interior lighting


Doors, window lift and seat control

In-Vehicle Infotainment and navigation

#### Dimensions: [mm]

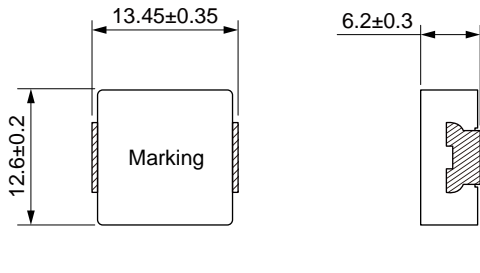












#### Land Pattern: [mm]




#### Electrical Properties:


Saturation Current will cause L to drop approximately 30%.  
 Temperature Rise Current: The actual value of DC current when the temperature rise is T=40°C

## Typical Electrical Characteristics:

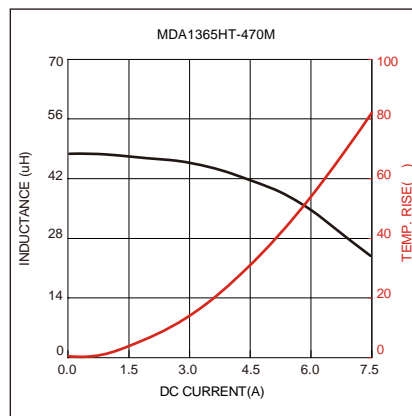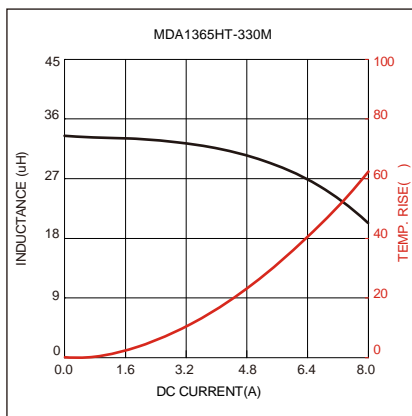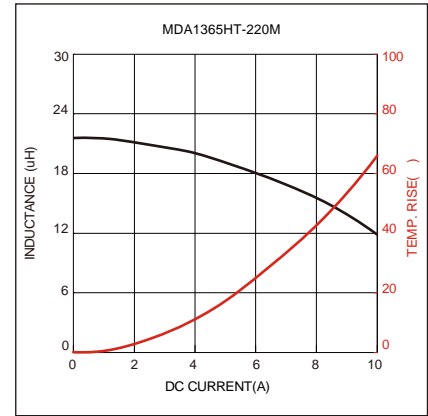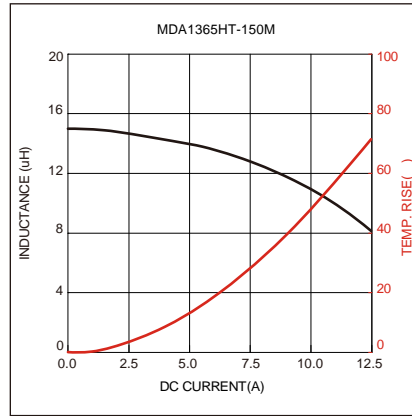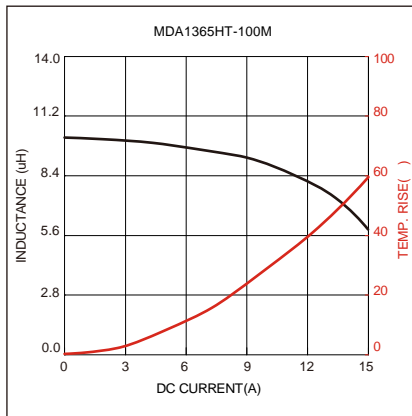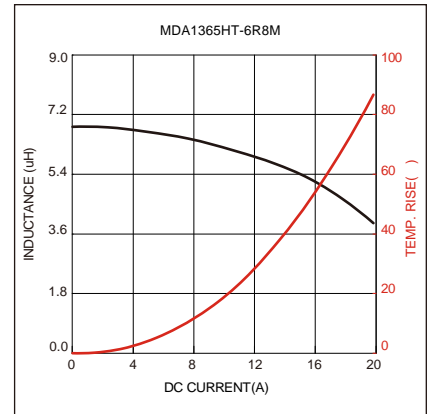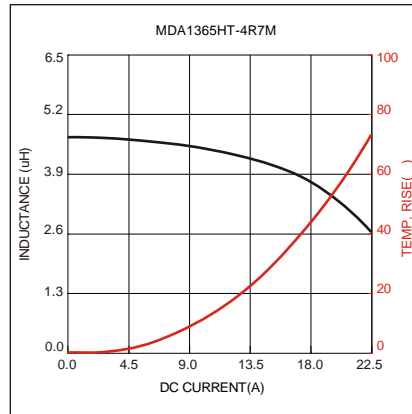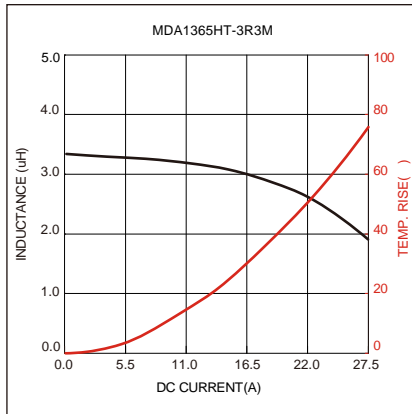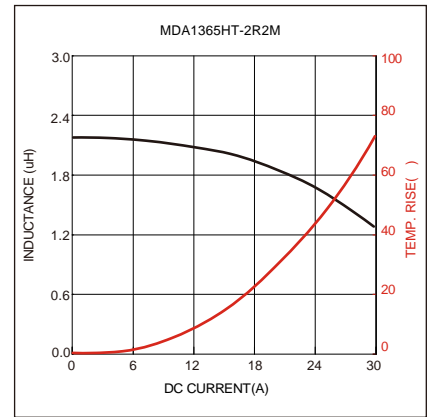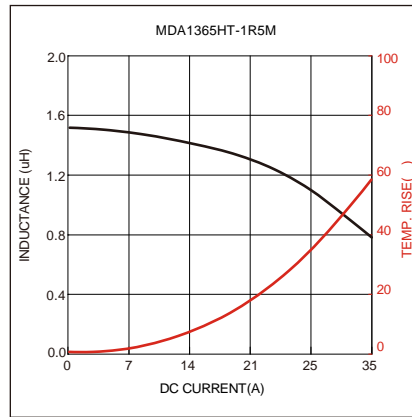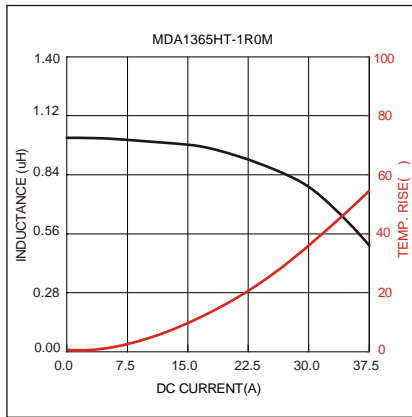

## Soldering Reflow:

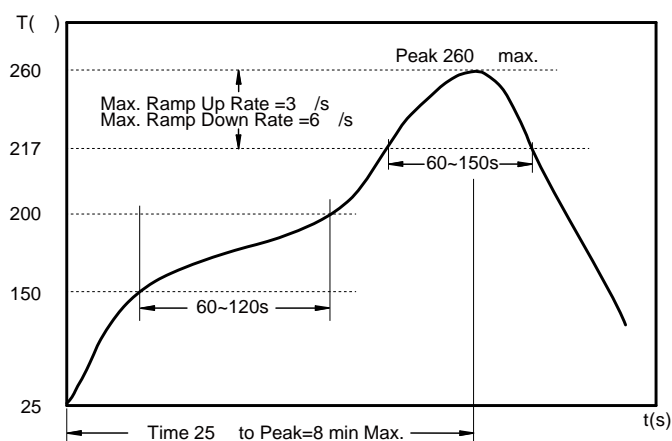

Preheat condition: 150 ~200 / 60~120 sec.


Allowed time above 217 : 60~150 sec.

Max temperature: 260 .

Allowed Reflow time: 2x max.


## Packaging Information:

### Tape Dimension :

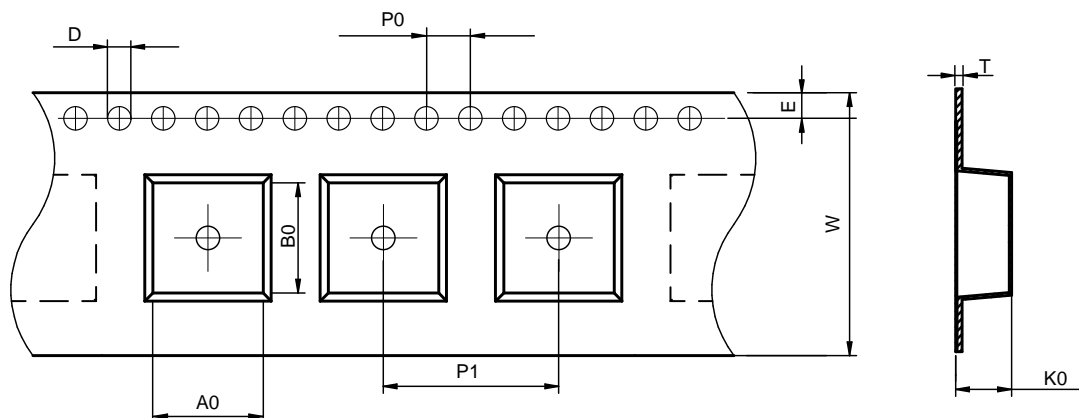

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDA1365HT	13.1±0.1	14.0±0.1	1.5±0.1	4.0±0.1	16±0.1	24±0.3	6.7±0.1	1.75±0.1	0.50±0.05

### Peel force of top cover tape:


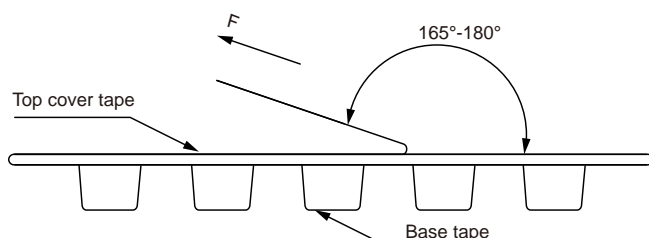


The peel force of top cover tape shall be between 0.1 to 1.3 N


### Product Marking:

Marking	KH+Printing (Inductance+period)
---------	---------------------------------


Reel Dimension : [mm]

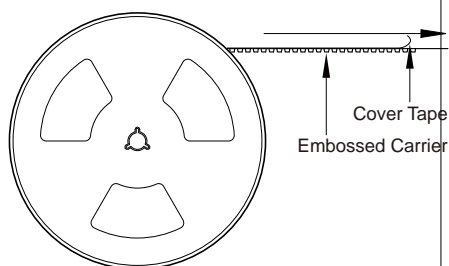


Packaging Quantity:



500 Pcs/Reel



2 Reel /Inner box( 1000 Pcs)



2 Inner box/Carton box(2K Pcs)

## Cautions and Warnings:

### Storage Conditions :

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

### Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components.The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does.As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.