


# MDA Series




## FEATURES

- Shielded construction
- 
- 
- Ultra low buzz noise, due to composite construction.
- 
- AEC-Q200 qualified
- Operating temperature: -55 to +155 °C (including self-temperature rise)
- Quantity: 3000PCS


## APPLICATION


- Noise filter for various drive circuitry requiring high temp. operation and peak current handling capability.
- Boost-Converter
- Buck-Converter DC/DC

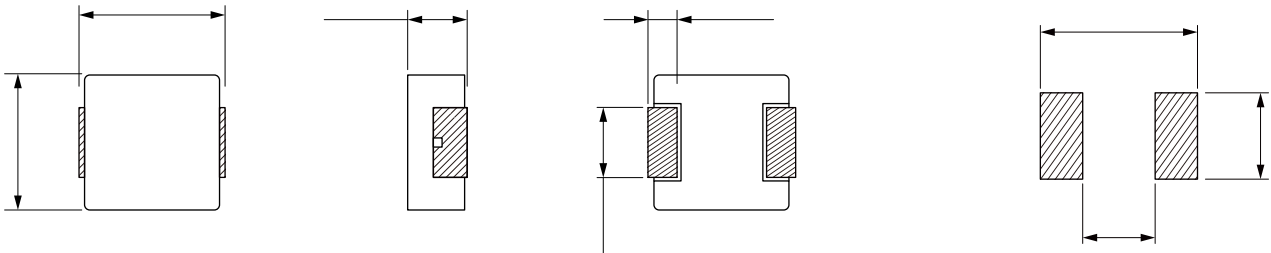


	( $\mu\text{H}$ )				Saturation	Saturation	( $\text{m}\Omega$ )	( $\text{m}\Omega$ )



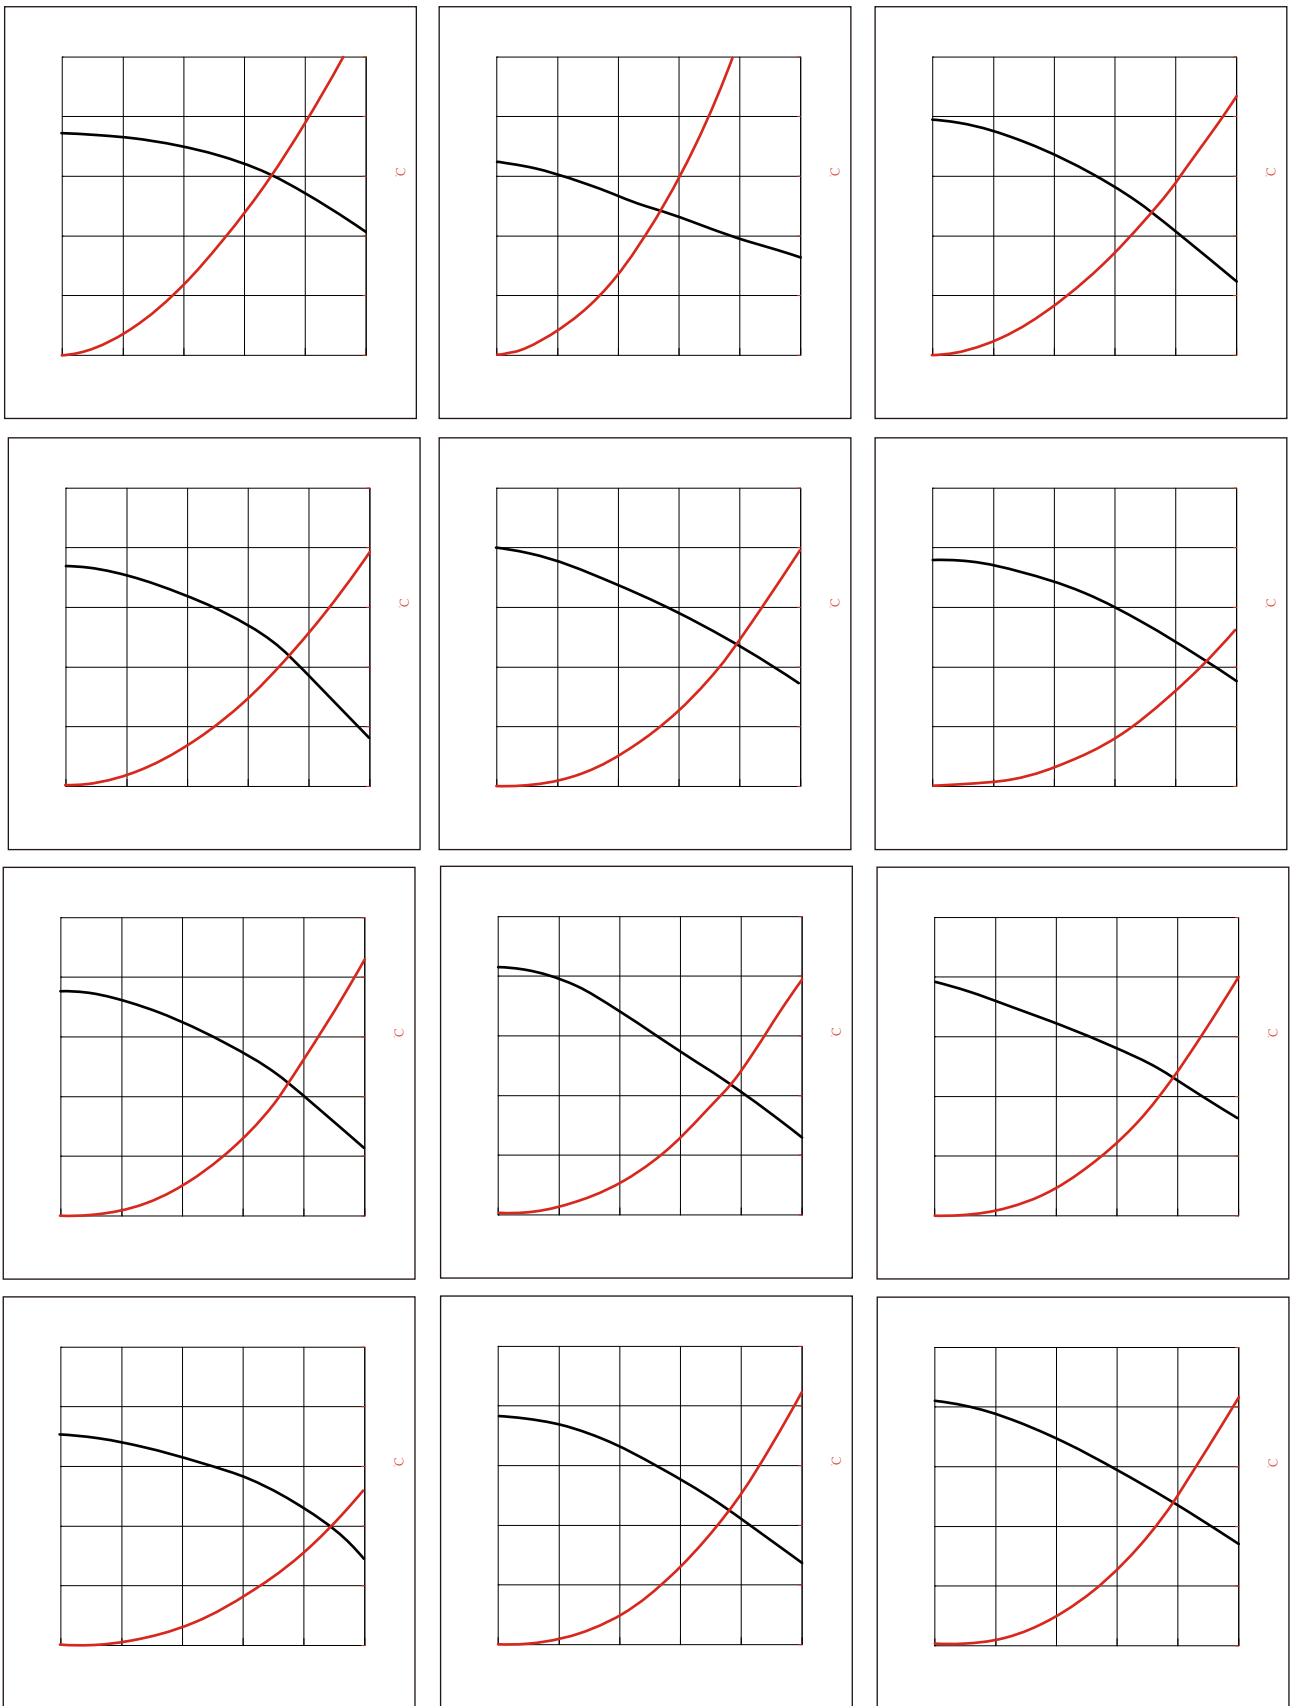


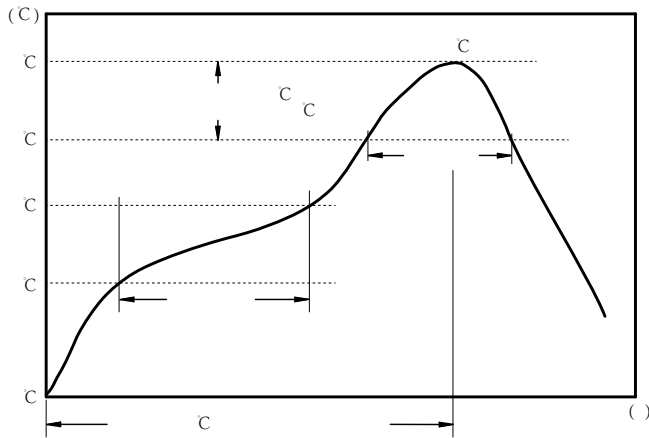c  
c  
c

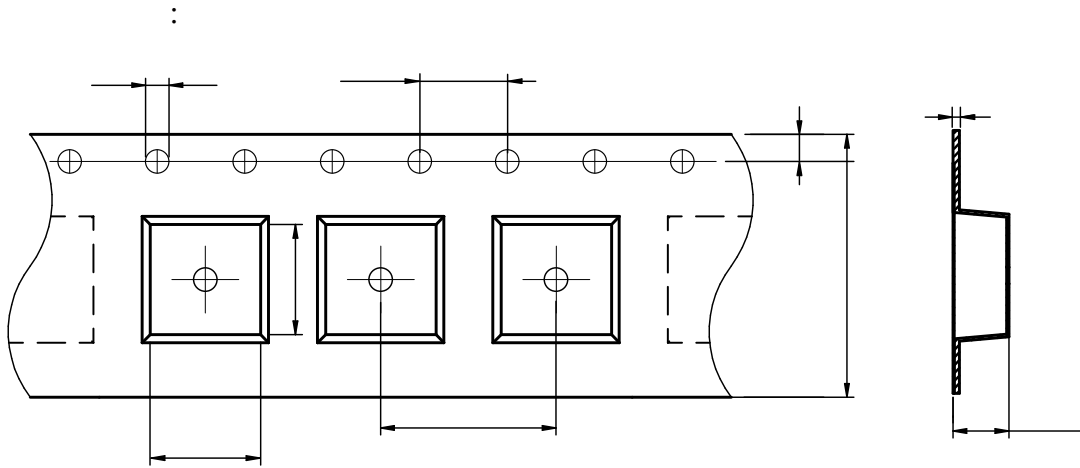







MDA4020	4.5± 0.1	4.85± 0.1	1.5± 0.1	4.0± 0.1	8.0± 0.1	12.0± 0.3	2.3± 0.1	1.75± 0.1	0.35± 0.05
---------	----------	-----------	----------	----------	----------	-----------	----------	-----------	------------

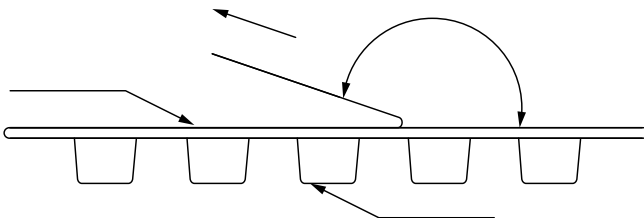

The peel force of top cover tape shall be between 0.1 to 1.3 N

Marking	K+Printing Inductance)
---------	------------------------

:

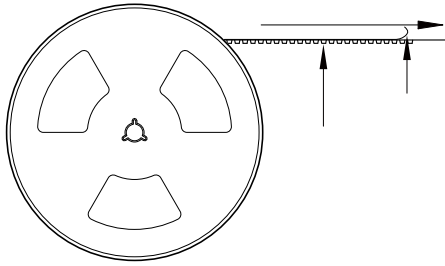

3000 Pcs/Reel

3 Reel /Inner box( 9000 Pcs)

3 Inner box/Carton box(27K Pcs)

:

- 
- 
- 
- 
- 
- 
- 
- 
-