

MDE Series




FEATURES

- High rated current
- Frequency up to 3 MHz
- 125 °C
- Low core loss
- Halogen Free & ROHS compliant
-
-

C C

APPLICATION

- C
- Switch and servers
- B
- DC DC
- B
- SSD modules

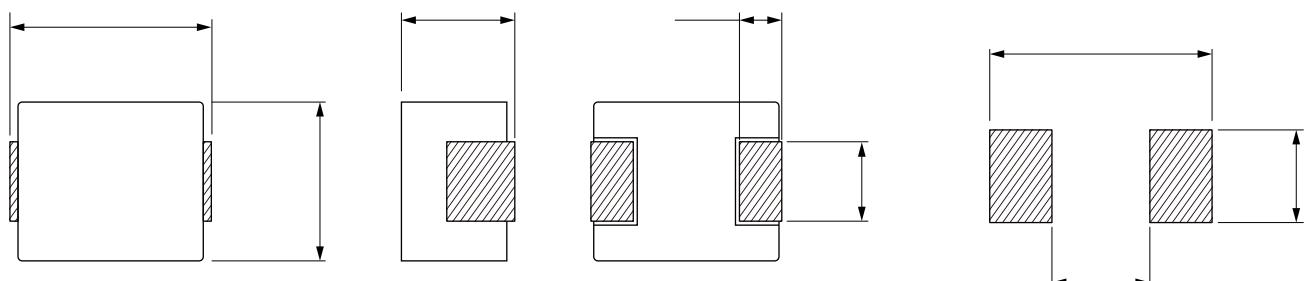

D					
D					13.5
D				12.5	12.4
D					
D					
D					
D					
D					
D					
D				125	
D					
D					

