


# MDTA Series

## Flat Wire Molded Inductor

### Size 1060



#### FEATURES



- Flat wire coil for low copper losses
- 
- 
- High current capability
- AE
- 
- 

#### APPLICATION

- Noise suppression for motor windings / power seats /
- 
- 

Dimensions: [mm]

Land Pattern: [mm]

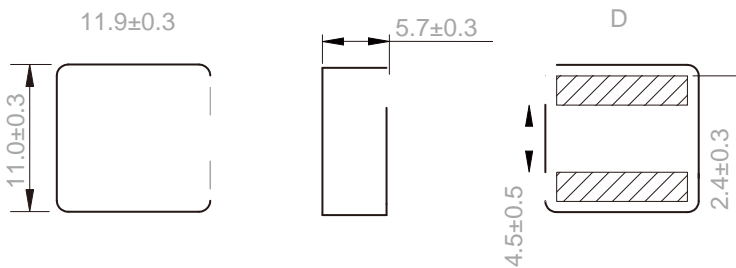


Electrical Properties:

Part No	L@100KHz /0.1V	Tolerance	I <sub>SAT</sub> Typ.	I <sub>R</sub>		R <sub>DC</sub> Max.	D
				20°C rise	40°C rise		
		±20%					
		±20%		20.0			
		±20%					
	2.20	±20%			20.0	20.0	
		±20%					
		±20%					

Saturation Current will cause L to drop approximately 30%  
 Temperature Rise Current that causes the specified temperature rise from 25°C ambient.

## Soldering Reflow:

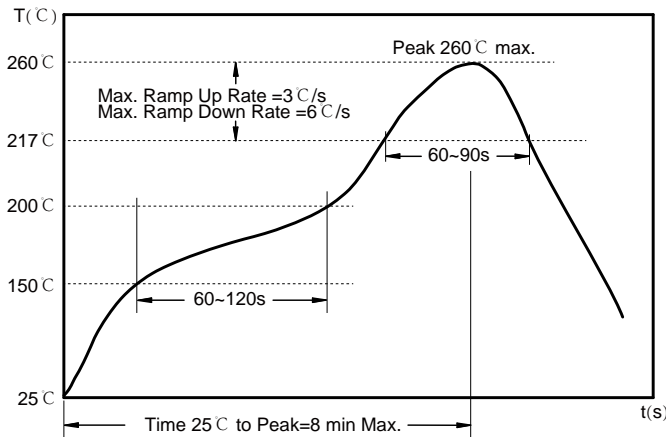

Preheat condition: 150 ~200 °C / 60~120 sec.

Allowed time above 217 °C : 60~90 sec.


Max temperature: 260 °C .

Max time at max temperature: 10 sec.

Allowed Reflow time: 2x max.


## Packaging Information:

### Tape Dimension :

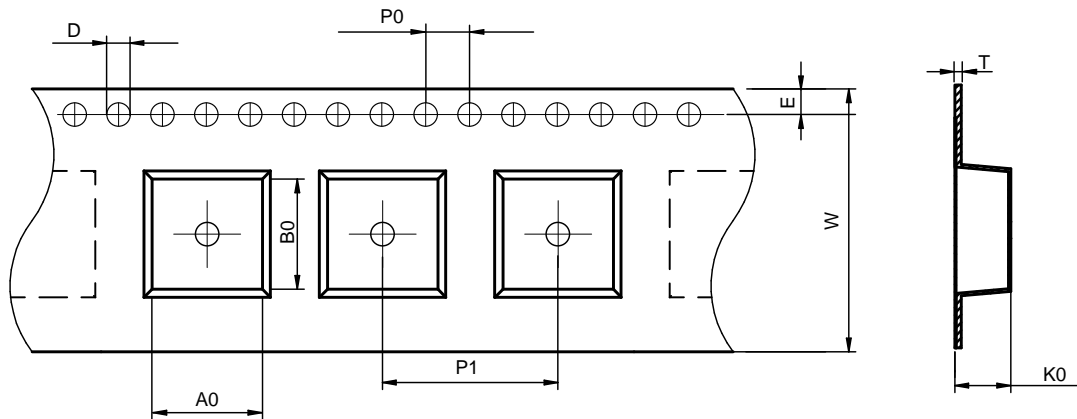

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDTA1060	12.4± 0.1	11.5± 0.1	1.5± 0.1	4.0± 0.1	16.0± 0.1	24.0± 0.3	6.3± 0.1	1.75± 0.1	0.50± 0.05

### Peel force of top cover tape:

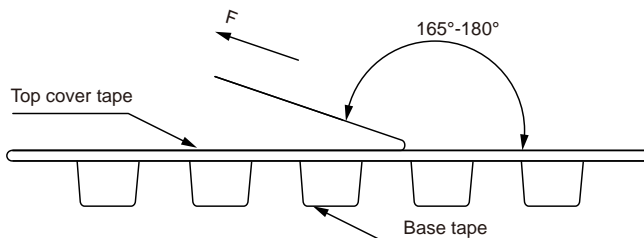


The peel force of top cover tape shall be between 0.1 to 1.3 N

### Product Marking:

Marking	Printing Inductance)
---------	----------------------



Reel Dimension: [mm]

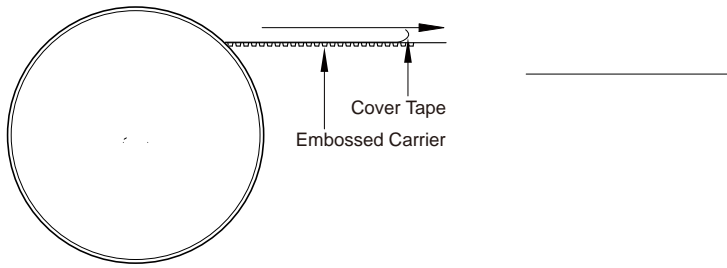

Packaging Quantity: