

MDTA Series

Flat Wire Molded Inductor

Size 5030




FEATURES

- Flat wire coil for low copper losses
-
-
- High current capability
- AE
-
-


APPLICATION

- Noise suppression for motor wipers / power seats/
-
-

Dimensions: [mm]

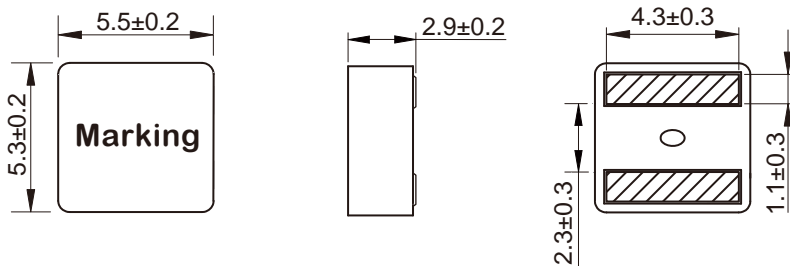

Land Pattern: [mm]












Electrical Properties:

Part No	L@100KHz /0.1V	Tolerance	I _{SAT} Typ.	I _R		R _{DC} Max.
				20°C rise	40°C rise	
MDTA5030-R15M	0.15	±20%	36.0	14.3	22.2	2.31
MDTA5030-R33M	0.33	±20%	28.0	13.8	19.2	3.52
MDTA5030-R47M	0.47	±20%	26.0	13.7	18.4	4.13
MDTA5030-R56M	0.56	±20%	22.2	13.6	17.7	4.52
MDTA5030-R60M	0.60	±20%	22.0	13.6	17.7	4.52
MDTA5030-R82M	0.82	±20%	19.7	9.9	12.9	5.78
MDTA5030-1R0M	1.00	±20%	16.5	9.0	12.2	7.60
MDTA5030-1R2M	1.20	±20%	15.0	8.5	11.0	9.70
MDTA5030-1R5M	1.50	±20%	14.0	8.0	10.5	11.2
MDTA5030-1R8M	1.80	±20%	12.3	7.6	10.1	12.7
MDTA5030-2R2M	2.20	±20%	10.0	7.2	9.70	14.5
MDTA5030-3R3M	3.30	±20%	9.50	5.9	8.10	23.1
MDTA5030-4R7M	4.70	±20%	8.20	4.3	5.90	36.3


Saturation Current will cause L to drop approximately 30%
 Temperature Rise Current that causes the specified temperature rise from 25°C ambient.

Typical Electrical Characteristics:

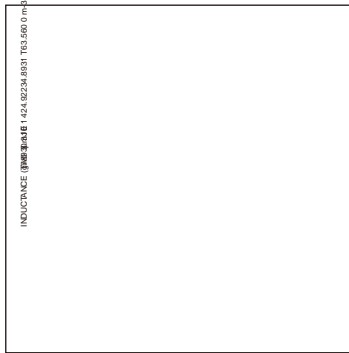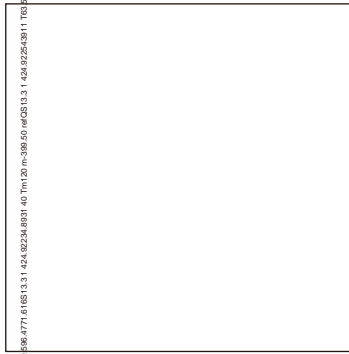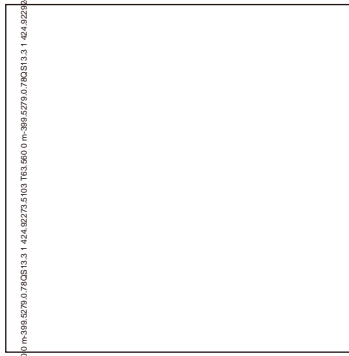

INDUCTANCE (www.koher.com) T63.500.0 m

Soldering Reflow:

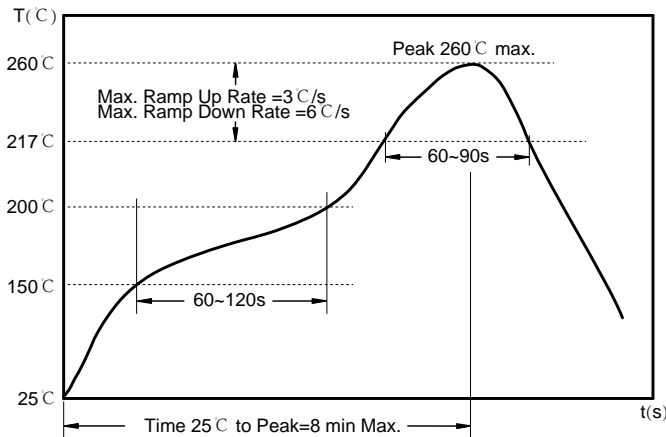

Preheat condition: 150 ~200 °C / 60~120 sec.

Allowed time above 217 °C : 60~90 sec.

Max temperature: 260 °C .

Max time at max temperature: 10 sec.


Allowed Reflow time: 2x max.

Packaging Information:

Tape Dimension :

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDTA5030	6.0±0.1	5.7±0.1	1.5±0.1	4.0±0.1	8.0±0.1	16.0±0.3	3.3±0.1	1.75±0.1	0.35±0.05

Peel force of top cover tape:

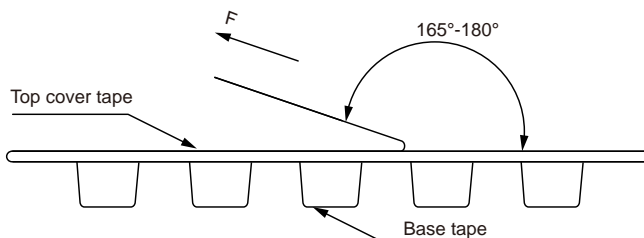


The peel force of top cover tape shall be between 0.1 to 1.3 N


Product Marking:

Marking	Printing (Inductance)
---------	-----------------------

Reel Dimension: [mm]

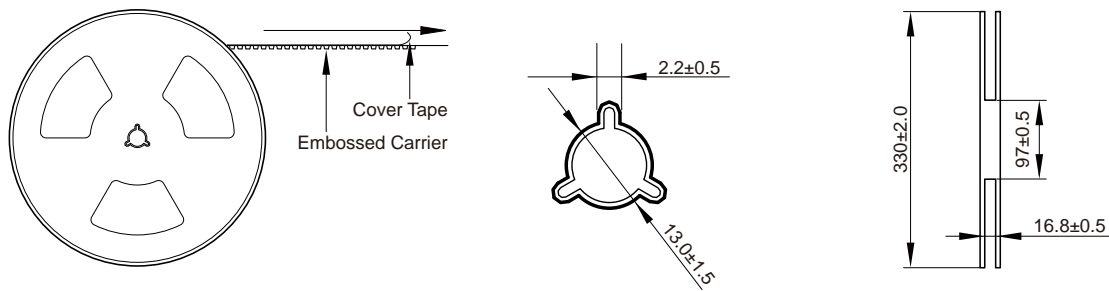

Packaging Quantity:

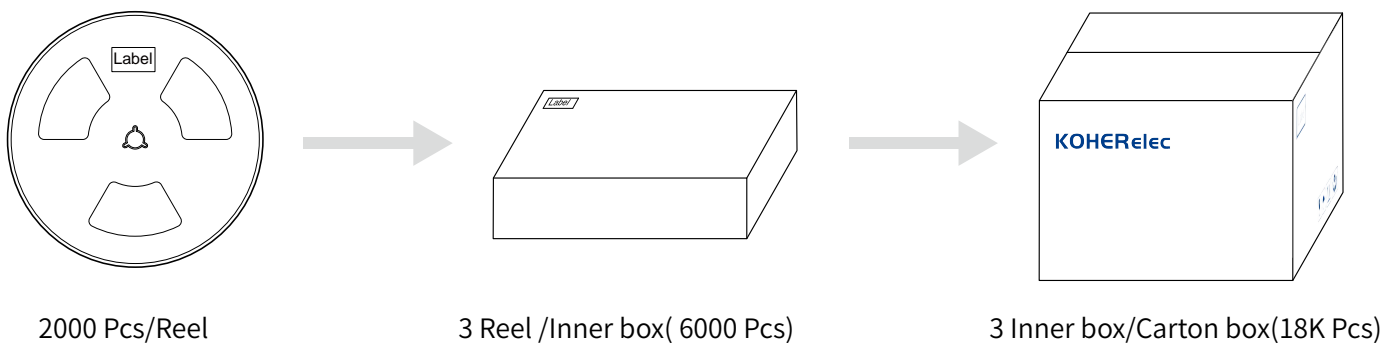

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.