



-
- Composite core material allows high saturation currents
- Very low acoustic noise and very low leakage flux noise
- High inrush capability and handles high transient inrush
- C-Q200 qualified
- Operating temperature -55 to +155°C (Including self-temperature rise)
- Quantity: 1000pcs

- DC/DC converters for entertainment/navigation systems
 session
 s windshield
 power mirrors/heating and ventilation blowers/HID lighting
- LED driv

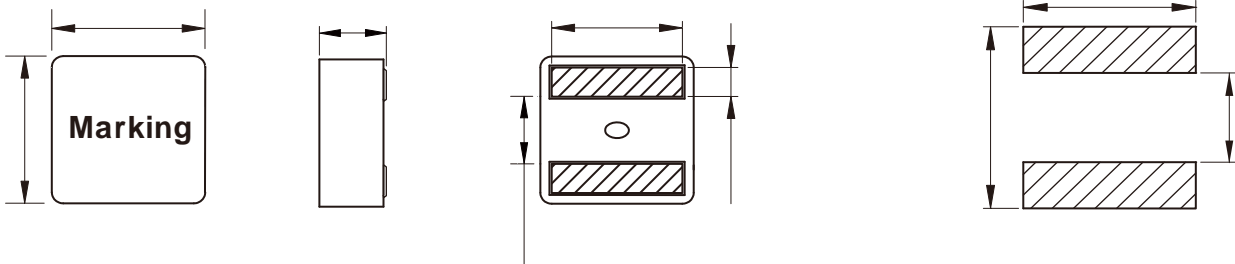


MDTA6030-R18M	0.18					1.75	2.8±0.2	5.30±0.3
					25.0	2.50	2.8±0.2	5.55±0.3
MDTA6030-R56M	0.56			17.0		3.31	2.8±0.2	5.30±0.3
MDTA6030-R68M	0.68		25.0	15.0		5.17	2.8±0.2	5.30±0.3
MDTA6030-1R0M	1.00			13.0	18.0	6.05	2.8±0.2	5.20±0.3
MDTA6030-1R2M	1.20			12.0	16.0		2.8±0.2	5.15±0.3
MDTA6030-1R5M	1.50			11.0	15.0	9.13		5.15±0.3
MDTA6030-1R8M	1.80		18.2	10.0	14.0	10.2		5.10±0.3
			15.9		10.0	12.2		5.05±0.3
			12.2		8.00	20.8		5.00±0.3
MDTA6030-4R5M	4.50		10.0	5.00		25.3		5.00±0.3

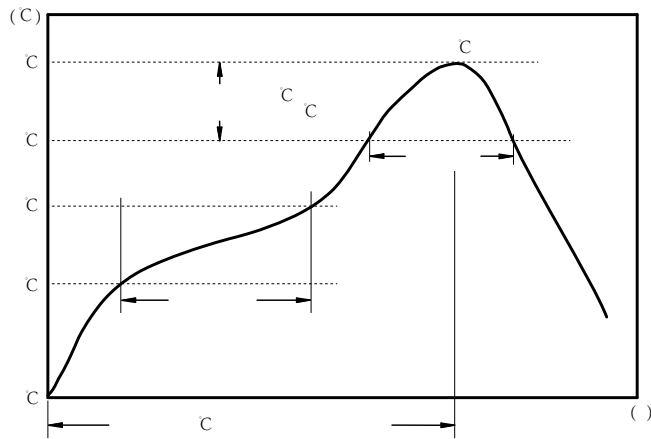

c
c
c

:

MDTA6030	7.0± 0.1	6.8± 0.1	1.5± 0.1	4.0± 0.1	12.0± 0.1	16.0± 0.3	3.3± 0.1	1.75± 0.1	0.35± 0.05

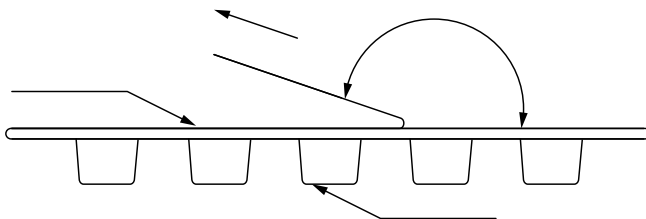

The peel force of top cover tape shall be between 0.1 to 1.3 N

Marking	Printing Inductance)
---------	----------------------

:

