

# **MDTE Series**




## FEATURES

- .
- °C
- .

### APPLICATION


- .

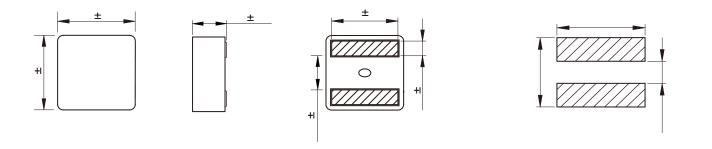


	Ř	e	ĸ	X
	X	Ð	ĸ	X
	ĸ	Ð	X	X
ToleranceDdite	ð	Ð	ĸ	х
Dd <b>if</b>	X	e	<b>X</b>	X
Ddita	<u> </u>	Ð	- X	X
Dd <b>iid</b>	١X X	đ	Ř	ĸ
Dd <b>iid</b>	X	e	Ř	ĸ
Dd <b>ī</b> ī2	ĸ	đ	ð.	X
Dd <b>ī</b> ī2	x	đ	ð	ĸ
Ddiff	Ň	Ð	<u> </u>	<b>K</b>


 $\triangle$ 



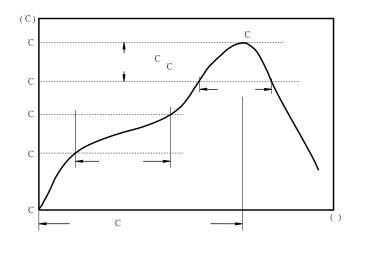


:



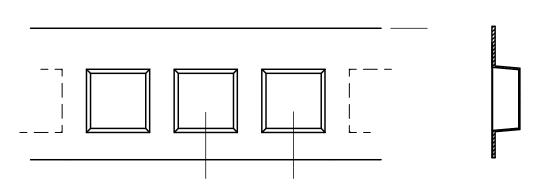


MDTE5020	6.0± 0.1	5.7± 0.1	1.5± 0.1	4.0± 0.1	8.0± 0.1	12.0± 0.3	2.3± 0.1	1.75± 0.1	0.35± 0.05



The peel force of top cover tape shall be between 0.1 to 1.3 N

Marking

Printing Inductance)

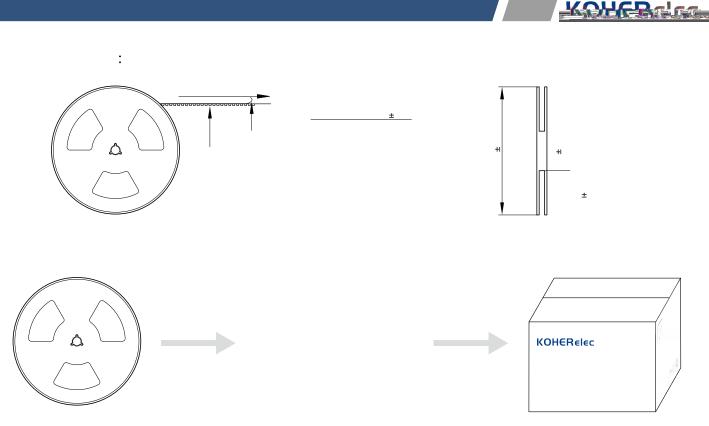

#### 3000 Pcs/Reel

#### 3 Reel /Inner box(9000 Pcs)

3 Inner box/Carton box(27K Pcs)

- :
- •
- •
- •
- •
- •
- •
- ,